


## HOT SPOT<sup>®</sup> COLLECTION

## STRIDE®



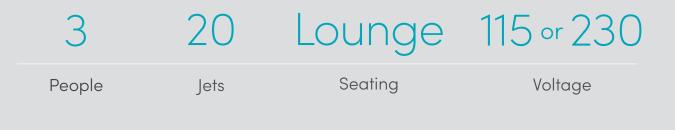

7' x 5'5" x 29"

## FROG<sup>®</sup> In-Line Cartridge Ready

Dimensions

Water Care

## HOT SPOT® COLLECTION STRIDE®







Stride spa shown with Alpine White shell and Almond cabinet.

Shell Colors





Almond H

**Cabinet Colors** 

Havana	Storm		



**Cover Colors** 

Nutmeg Stone

Seating Capacity Dimensions	3 people 7' x 5'5" x 29" / 2.13 m x 1.65 m x 0.74 m	Control System	IQ 2020® 115 V / 20 amp,** 60 Hz (Includes G.F.C.I. protected power cord) or 115 V / 30 amp*** or 220 V / 50 amp,*** 60 Hz
Water Capacity	225 gallons / 850 liters	Lighting – Interior	6 multi-color LED points of light, dimmable
Weight	570 lbs. / 260 kg dry; 2,975 lbs. / 1,350 kg filled*	Lighting – Exterior	4 multi-color LED points of light, dimmable
Jets (All with stainless steel trim)	20 total • 1 XL Directional Hydromassage jet	Heater	No-Fault $^{\otimes}$ 1,000 W / 115 V or 4,000 W / 230 V
<ul> <li>1 XL Birectional Hydromassage jet</li> <li>1 XL Rotary Hydromassage jet</li> <li>3 Directional Hydromassage jet</li> <li>1 Rotary Hydromassage jet</li> <li>14 Directional Precision<sup>®</sup> jets</li> </ul>	Energy Efficiency	FiberCor® Insulation; Certified to California Energy Commission (CEC) and APSP 14 energy efficiency standards for portable spas	
Lot Dump	Wavemaster <sup>®</sup> 6200; Two-speed,	Effective Filtration Area	30 sq. ft., top loading
Jet Pump	1.5 HP Continuous Duty, 3.2 HP Breakdown Torque	Vinyl Cover	3.5" to 2.5" tapered, 1.5 lb. density foam core
	·	Cover Lifter (Optional)	CoverCradle®, CoverCradle II, or UpRite®
Floor Drain Water Care System	Included FROG® In-Line Cartridge Ready	Steps (Optional)	Everwood® - Almond, Havana, and Storm Polymer - Ash

Actual colors and products may vary from print representation. See dealer to verify. \* Includes water and 3 adults weighing 175 lbs. each. \*\*Requires a dedicated circuit supplied to the unit at all times. Electrical requirements will vary outside the U.S. \*\*\* G.F.C.I. protected sub-panel required in 30 amp conversion or 220 V mode. Export models available in 230 V, 50 Hz, 1,000 W heater.